


RENOLIT ALKORPLAN VOGUE/TOUCH/CERAMICS/2000/3000 *Reinforced pool membrane for on site lining*



We offer you the pool of your dreams

If you want an attractive pool that will give you no problems, **RENOLIT** ALKORPLAN reinforced liner is the perfect product to achieve this.

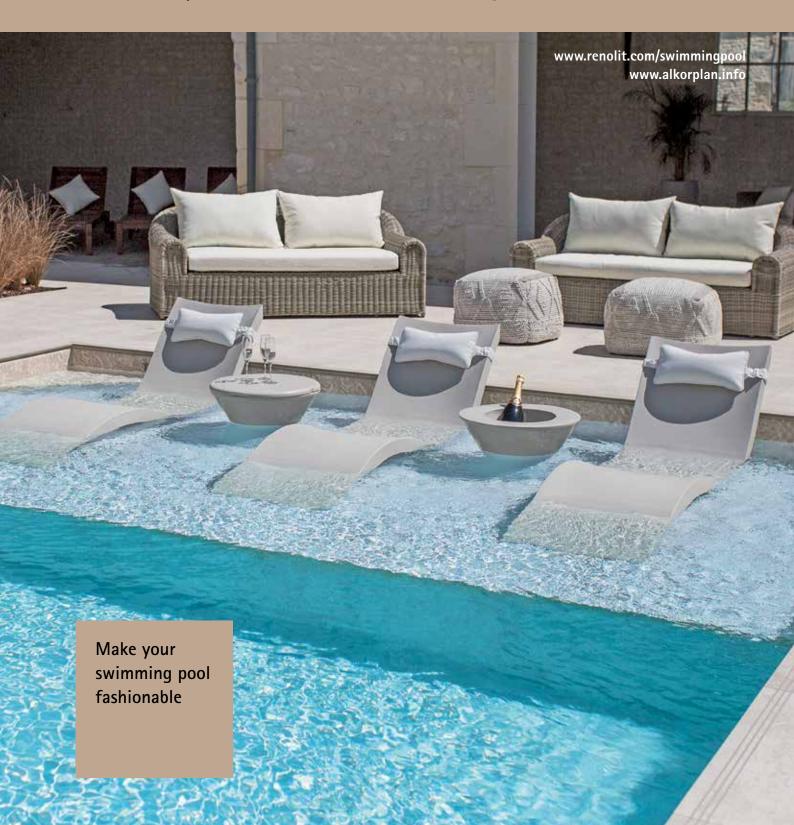

With **RENOLIT** ALKORPLAN this won't happen ...!

RENOLIT ALKORPLAN makes your dreams come true.

Our pool liners convert even the most modest pool into the centre of attraction in your garden, regardless of its size or its location.

RENOLIT ALKORPLAN and its many options help you create a unique and exclusive setting for your enjoyment.

No matter what your garden looks like RENOLIT ALKORPLAN allows you to create a unique, customised area just for you.



Large pools or tiny pools ...

Many hotel pools, Olympic pools or aquatic park pools in Europe have **RENOLIT ALKORPLAN** liners installed in them, as apart from requiring minimum maintenance, they guarantee complete water-tightness and it is possible to install them in half the time it takes to install other systems.

- It can be installed on any surface.
- Clean installation, with no noise and in half
- the time it takes to install other liners.
- It requires practically no maintenance.
- No matter the size and shape of the pool.

Wherever you can imagine a pool, RENOLIT ALKORPLAN will make it come true, no matter how small the space you have.




RENOLIT ALKORPLAN adapts to your needs

The ideal lining for both commercial and residential pools.



RENOLIT ALKORPLAN allows you to enjoy your pool in peace, without worrying about leaks.

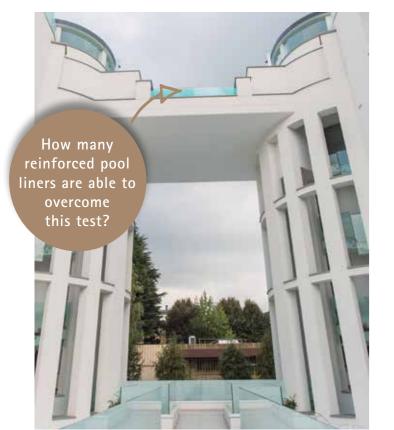

RENOLIT ALKORPLAN is the perfect liner for rooftop pools, basement pools or any place where there are cracks or micro pores that could cause dampness, water leaks or flooding.







is marked on the back ... Check it!

Reinforced membrane ranges for all tastes ...



2 mm reinforced laminate, printed and with relief, inspired in interior design and trends. With the same properties as the TOUCH range.










waterproof.

RENOLIT ALKORPLAN VOGUE



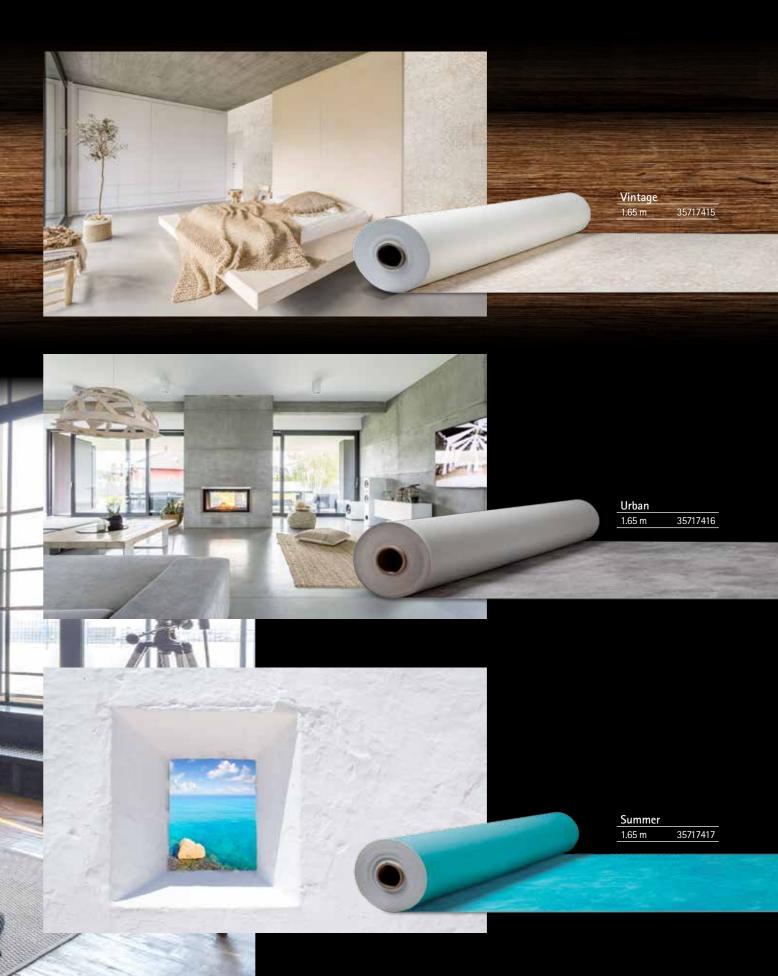


If you are looking for comfort and design in your home, why don't you do it in your pool as well?



IT ALKORPLAN VOGUE	Width	Thickness	Ref.	SLIP RESISTANCE Category
e	1.65 m	2 mm	35717415	C



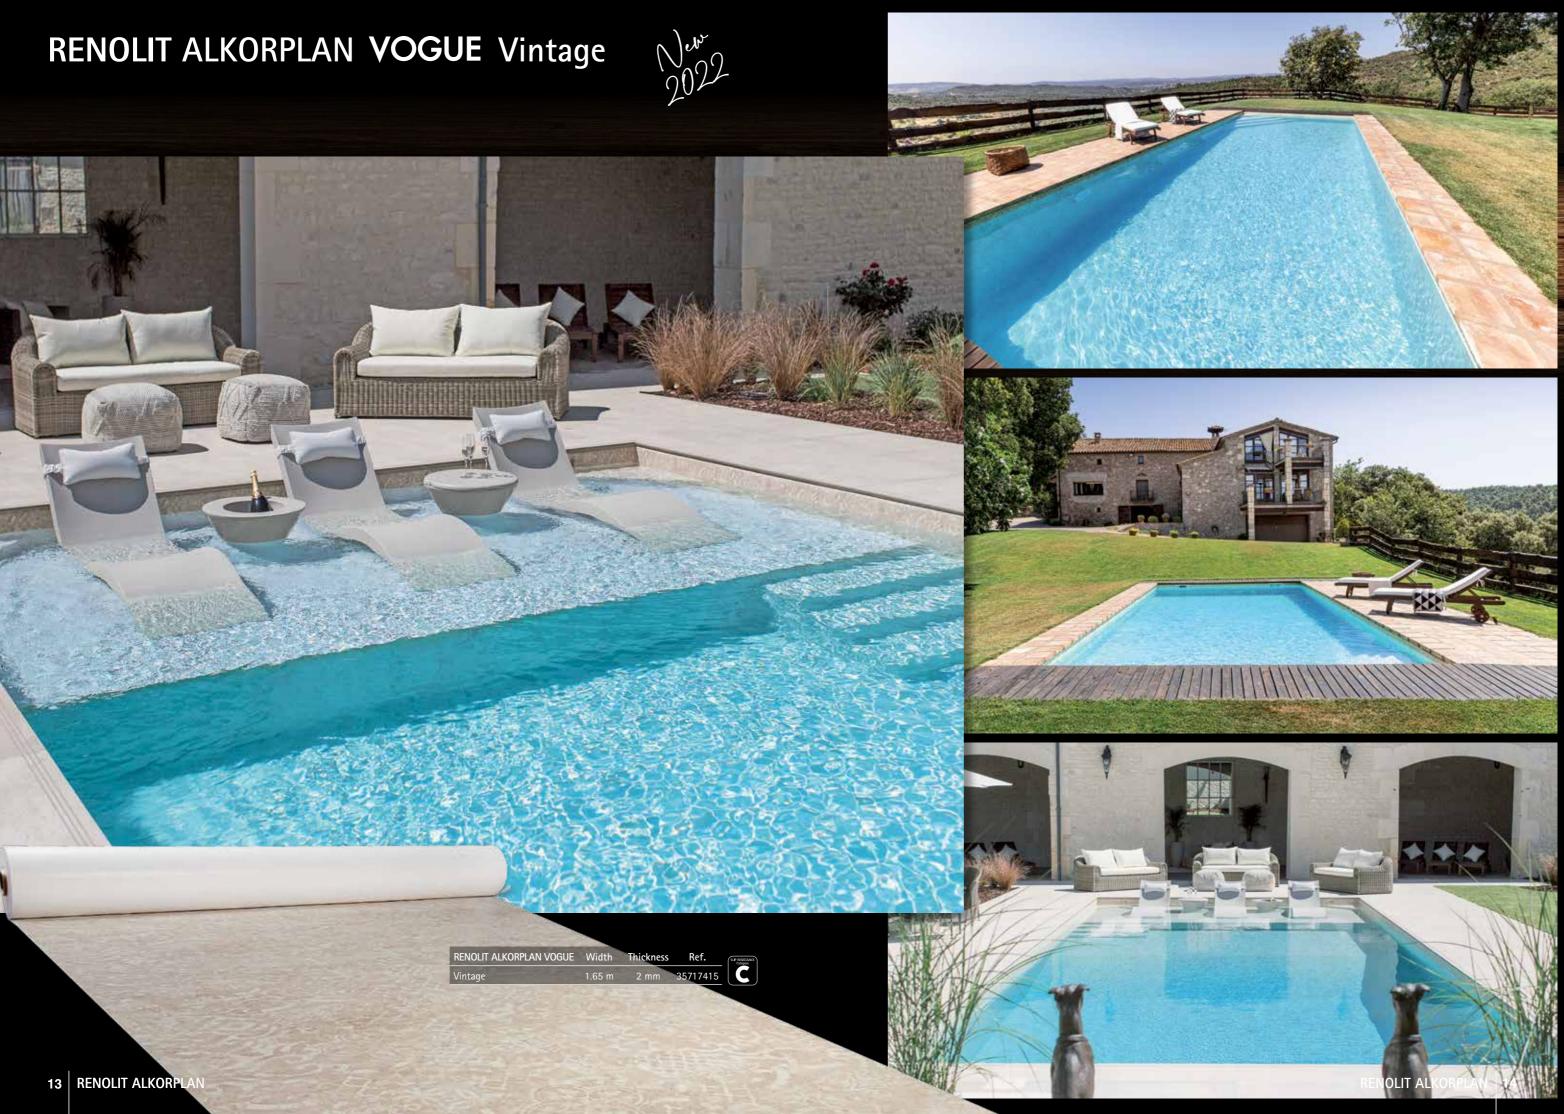



LIT ALKORPLAN VOGUE	Width	Thickness	Ref.	SLIP RESISTANCE Category
	1.65 m	2 mm	35717416	

RENOLIT ALKORPLAN **VOGUE** Urban

1





RENOLIT ALKORPLAN VOGUEWidthThicknessRef.Urban1.65 m2 mm35717416

17 RENOLIT ALKORPLAN



LIT ALKORPLAN VOGUE	Width	Thickness	Ref.	SLIP RESISTANCE Category
ier	1.65 m	2 mm	35717417	





RENOLIT ALKORPLAN




Reinforced liner with exclusive 3D designs and prints, inspired by nature

You will turn your home into a haven of design and character

RENOLIT ALKORPLAN TOUCH is the first reinforced membrane with a heavily riven stone finish. At 2mm thick it is the strongest and most resistant liner in the market. The imaginative design of the liner makes it the most appropriate element for adding a personal note to your pool and making your home a unique place. The **TOUCH** liners emulate nature through adding a simulated stone finish to exotic baths, adding personality and singularity to the pools in which they are used, making each pool unique.

You will have a unique and exclusive pool!

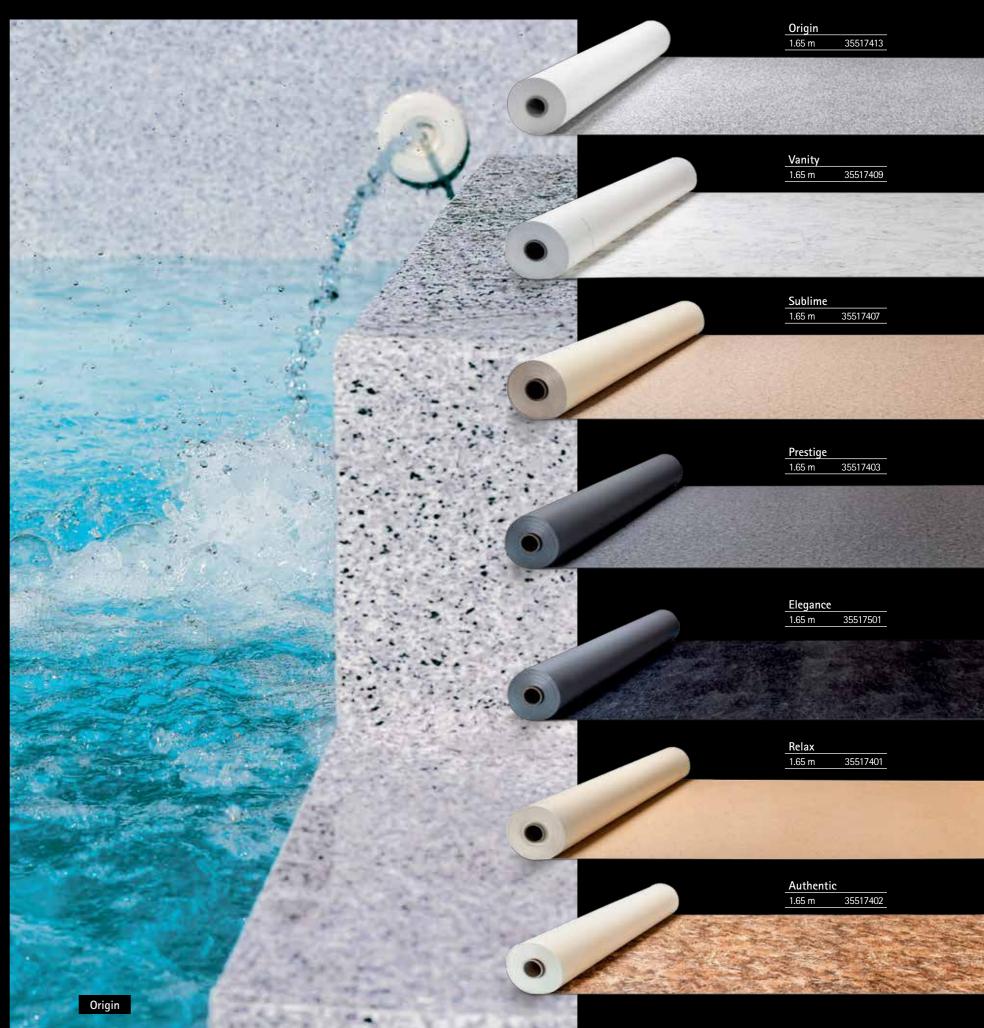



LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SUP RESISTANCE Category
1	1.65 m	2 mm	35517413	C

RENOLIT ALKORPLAN TOUCH Origin

Elegant and timeless - delicate texture metallic hints. Inspired by one of the most noble stones in nature: granite.

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Origin
 1.65 m
 2 mm
 35517413





LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SUP RESISTANCE Category
/	1.65 m	2 mm	35517409	

RENOLIT ALKORPLAN **TOUCH** Vanity

Spectacular, ostentatious white marble swimming pools that will be the pride of the owners.

on or provide on efficiency and

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Vanity
 1.65 m
 2 mm
 35517409





LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SUP RESISTANCE Category
ne	1.65 m	2 mm	35517407	C

RENOLIT ALKORPLAN **TOUCH** Sublime

Imitative of travertine limestone that creates pools with warm reflections ideal for exclusive and naturalist settings.

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Sublime
 1.65 m
 2 mm
 35517407






LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SUP RESISTANCE Category
ge	1.65 m	2 mm	35517403	

RENOLIT ALKORPLAN **TOUCH** Prestige

A liner that creates a pool which invokes a volcanic rock paradise, conceived for designer and minimalist settings .

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Prestige
 1.65 m
 2 mm
 35517403
 C

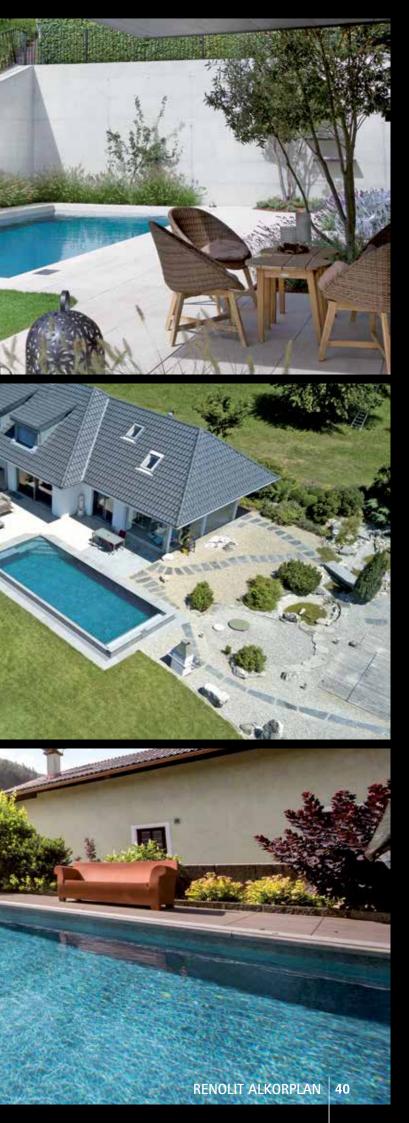



IT ALKORPLAN TOUCH	Width	Thickness	Ref.	SLIP RESISTANCE Category
ce	1.65 m	2 mm	35517501	

RENOLIT ALKORPLAN TOUCH Elegance

Luxurious, seductive, unique pools in deep blue tones that will captivate you at first sight and turn your home into an elegant palace.

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Elegance
 1.65 m
 2 mm
 35517501
 C






LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SLP RESISTANCE
	1.65 m	2 mm	35517401	C

RENOLIT ALKORPLAN TOUCH Relax

Sensual, exotic pools with golden sand and brilliant turquoise reflections, that will take you to the remote beaches of the Caribbean.

RENOLIT ALKORPLAN TOUCHWidthThicknessRef.Relax1.65 m2 mm35517401



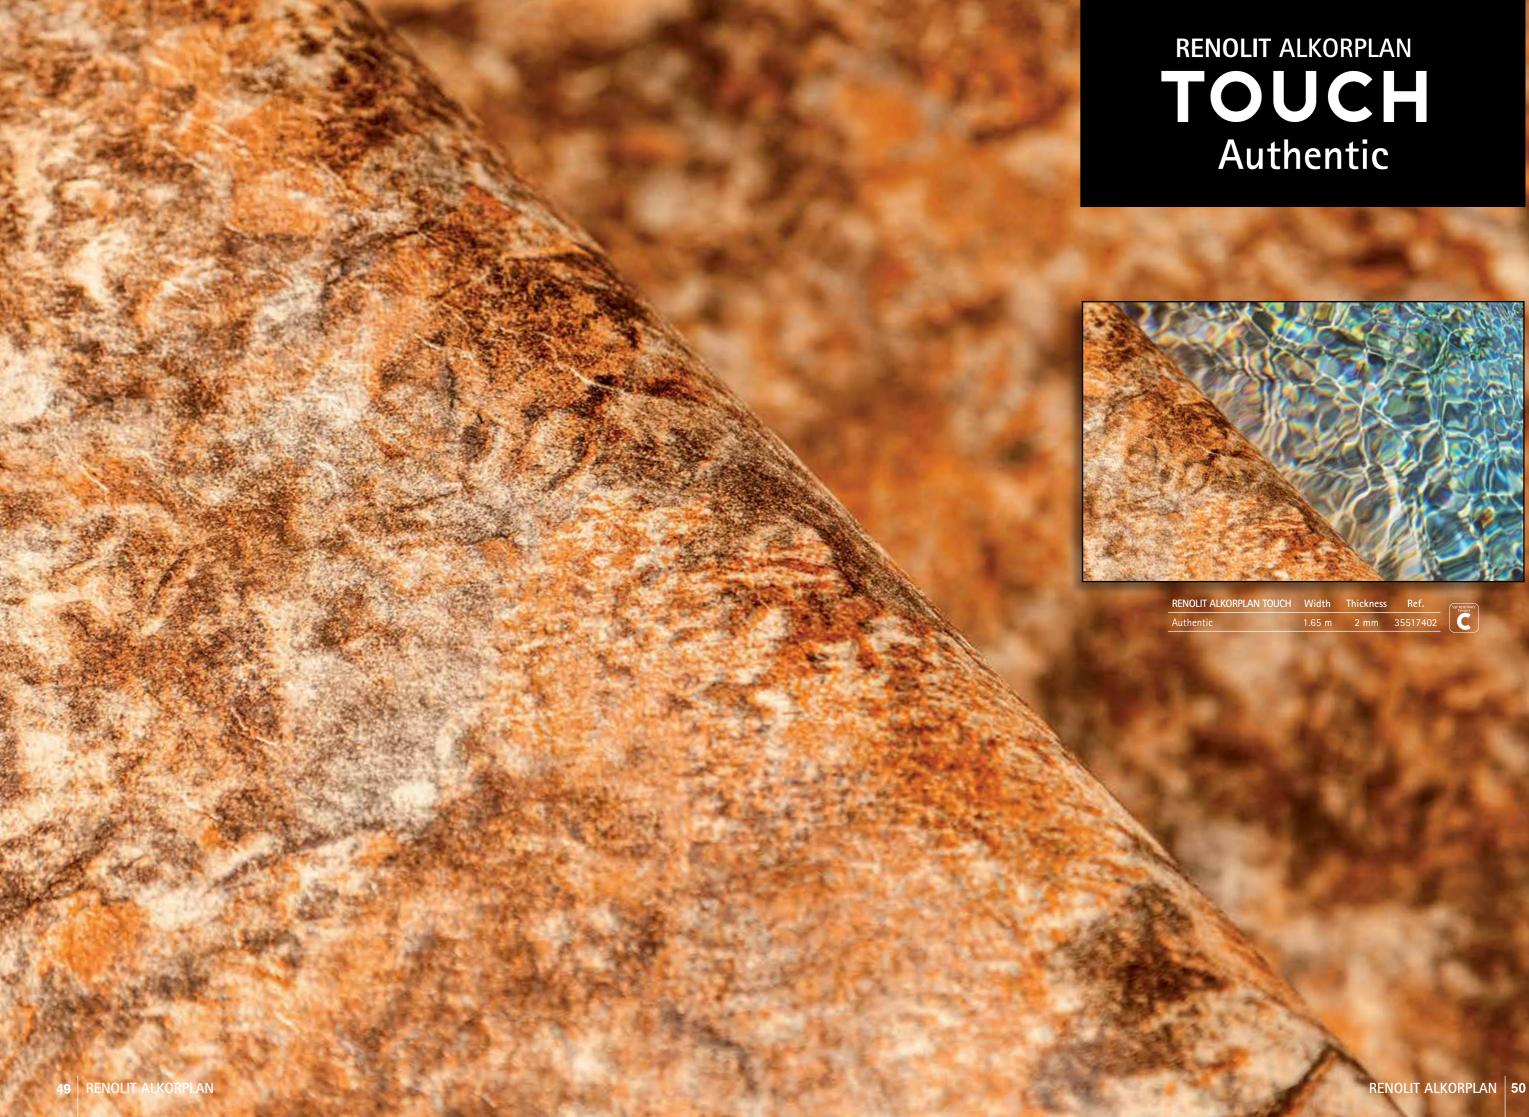

LIT ALKORPLAN TOUCH	Width	Thickness	Ref.	SLIP RESISTANCE Category
entic	1.65 m	2 mm	Ref. 35517402	

RENOLIT ALKORPLAN **TOUCH** Authentic

Rustic pools with exquisite stone textures, creating different tones in the water, brilliant and colourful, perfect for natural settings or country gardens.

 RENOLIT ALKORPLAN TOUCH
 Width
 Thickness
 Ref.

 Authentic
 1.65 m
 2 mm
 35517402
 C



Sales and



It looks like ... but isn't!



www.alkorplan.info/ceramics

No detached tiles or crumbling grouting!! **RENOLIT ALKORPLAN CERAMICS, 2 mm reinforced laminate, printed and with**

relief, inspired in ceramic tiles.

Ideal for new pools and for renovations! It is installed over the existing substrate in half of the time than other linings. It guarantees the watertightness for 10 years with minimal maintenance!

With the most careful aesthetics and with many advantages over any existing pool liner in the market:



Quick and easy installation compared to glass mosaic tiling.

- No fallen tiles or crumbling grout.
- Minimum maintenance.
- The 2mm thickness creates a more durable and resilient membrane.
- Easy to weld with an immaculate finish.



RENOLIT ALKORPLAN CERAMICS Width Thickness Ref. Selene 1.65 m 2 mm 35617203



RENOLITALKORPLAN CERAMICS RENOLIT ALKORPLAN CERAMICS Selene









RENOLIT ALKORPLAN CERAMICS	Width	Thickness	Ref.
Etna	1.65 m	2 mm	35617204



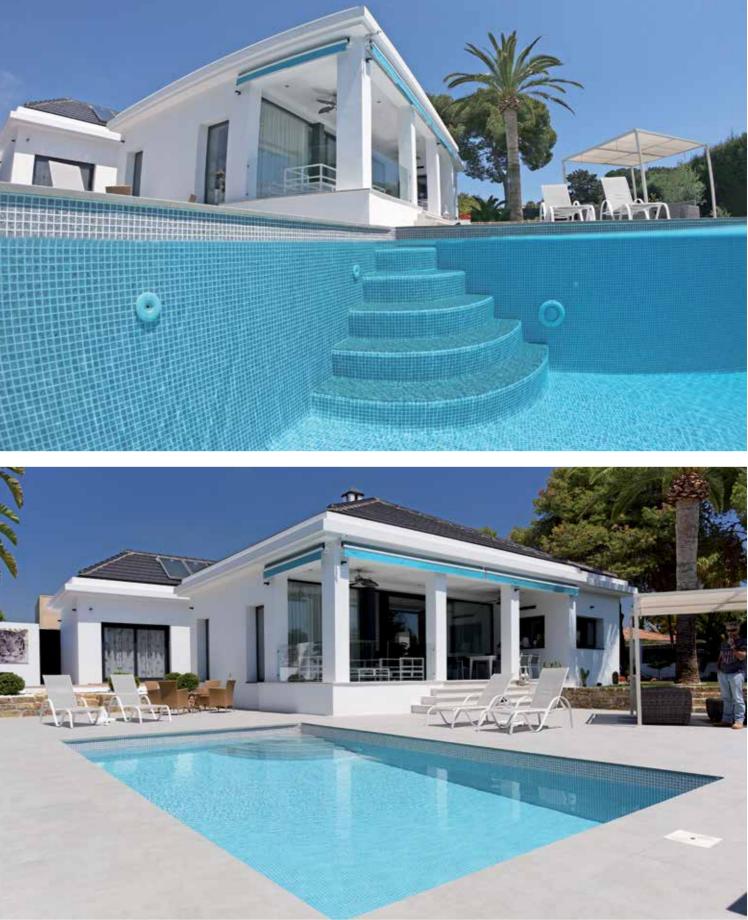

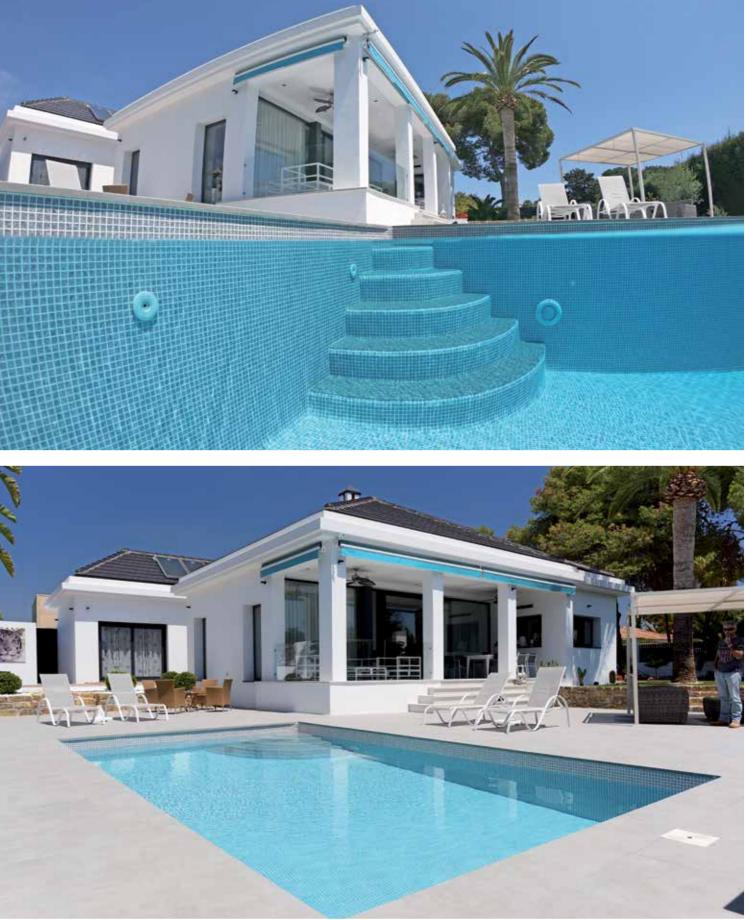




RENULTI ALKORPLAN C	ENAIVIICS VVIatri	THICKNESS	nel.
Atenea	1.65 m	2 mm	35617202





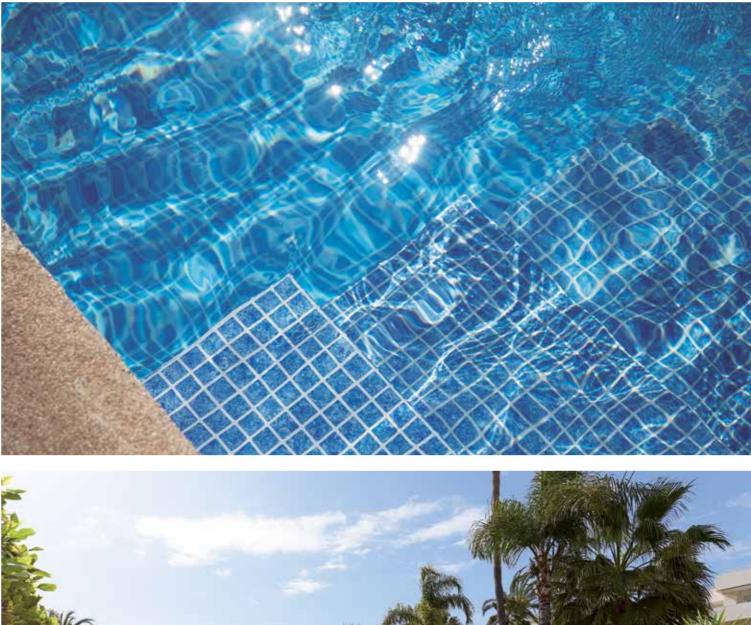



RENOLITALKORPLAN CERAMICS RENOLITALKORPLAN CERAMICS Atenea

RENOLIT ALKORPLAN

MPr 200

Dark Grey

2			
	/		
	14/1-14-1		
/	White	35216202	
	1.65 m 2.05 m	35216202	
	1.65 m Non-Slip	81116701	- 50
	Internet Ship Internet		-
	Sand		
/	Sand	25210210	
	1.65 m 2.05 m	35216210	
		35216211	HH
	1.65 m Non-Slip	ing 81116705	ff
	en	aggeretet	m
	4		25
	15		the
	H	11-11-1	25
	1 45		154-1
	Light Blue		Ser L
	1.65 m	35216205	10.0
hitse	2.05 m	35216208	1. 8
	1.65 m Non-Slip	nst 81116704	1.000
	in the sector	A SALAR SALAR	
	a constitution of a second		E AR
-			3-1-1
	- Inder		14
			and a
	Adriatic Blue	A CONTRACTOR	2 925
	1.65 m	35216203	
	2.05 m	35216207	
	1.65 m Non-Slip	nsi 81116702	1
	entos		
			1
			2 PE
Contraction of the local division of the loc			-
	Allower		
/	Caribbean Green		INUN
	1.65 m	35216204	EX.
	The second		1
//	2.05 m	35216206	100
	1.65 m Non-Slip	net 81116703	+
	en		11-2
			1
1	-/ /		
	7/		
	Links O		510
	Light Grey	05040000	
	1.65 m	35216236	1
	2.05 m	35216233	
	1.65 m Non-Slip	¹ 81116706	
	env		12
			1
			1
-			1
	7		1
	Dulo	100	6 V .
	Dark Grev		

5.32

Dark Grey 1.65 m 35216327 2.05 m 35216326 1.65 m Non-Slip Model of the second of the s

RENOLIT ALKORPLAN2000 White

RENOLIT ALKORPLAN2000 Sand



RENOLIT /	ALKORPLAN2000	Width	Thickness	Ref.
White		1.65 m	1.5 mm	35216202
White		2.05 m	1.5 mm	35216201
White Nor	n-Slip	1.65 m	1.8 mm	81116701
	1953			






	A COMPANY OF A DESCRIPTION OF A			and the second second	
	RENOLIT ALKORPLAN2000	Width	Thickness	Ref.	
	Sand	1.65 m	1.5 mm	35216210	
5	Sand		1.5 mm		ed .
	Sand Non-Slip	1.65 m	1.8 mm	81116705	mprovesing!

RENOLIT ALKORPLAN2000 Light Blue

RENOLIT ALKORPLAN2000 Adriatic Blue

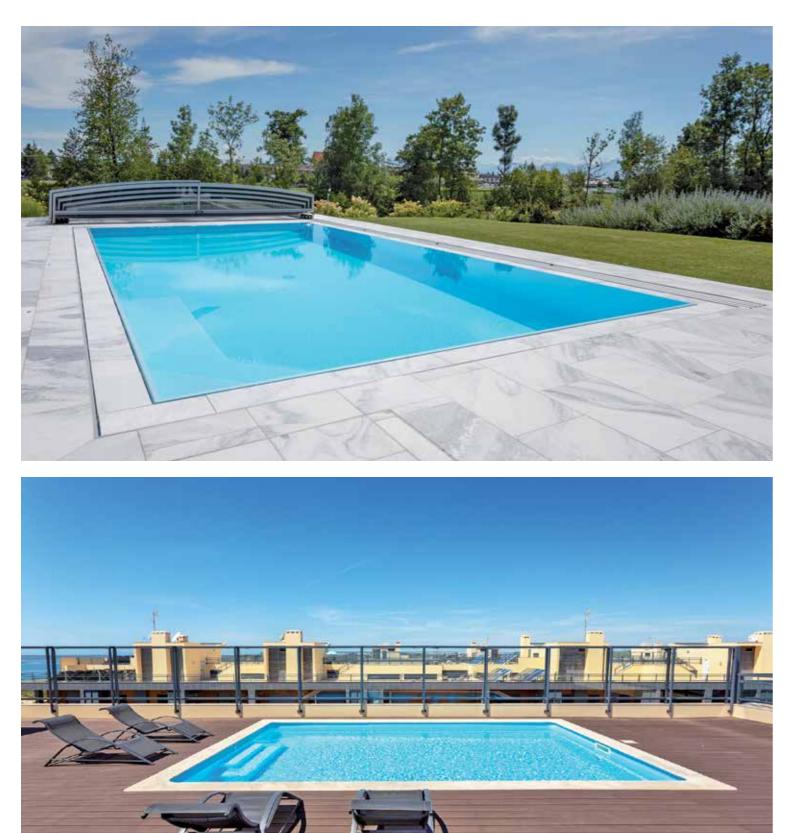

RENOLIT ALKORPLAN2000 Width

Light Blue

Light Blue

Light Blue Non-Slip

Thickness

1.5 mm

1.65 m 1.8 mm 8111670

1.65 m

2.05 m

Ref.

35216205


1.5 mm 35216208






RENOLIT ALKORPLAN2000 Light Grey

RENOLIT ALKORPLAN2000 Dark Grey

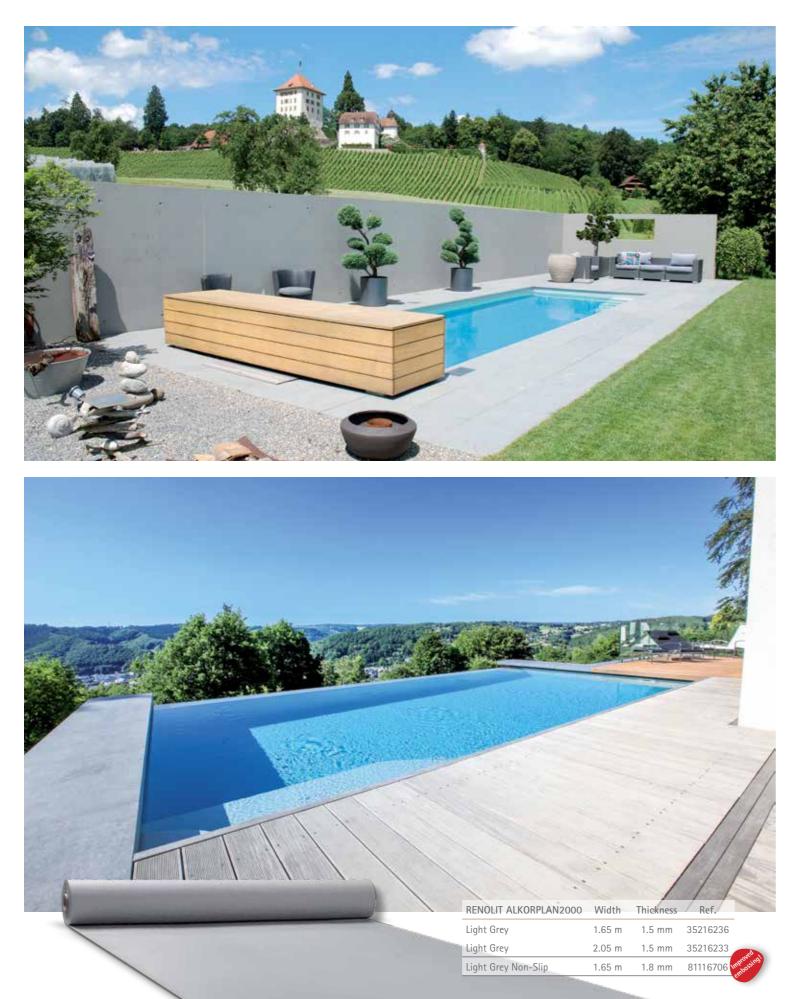




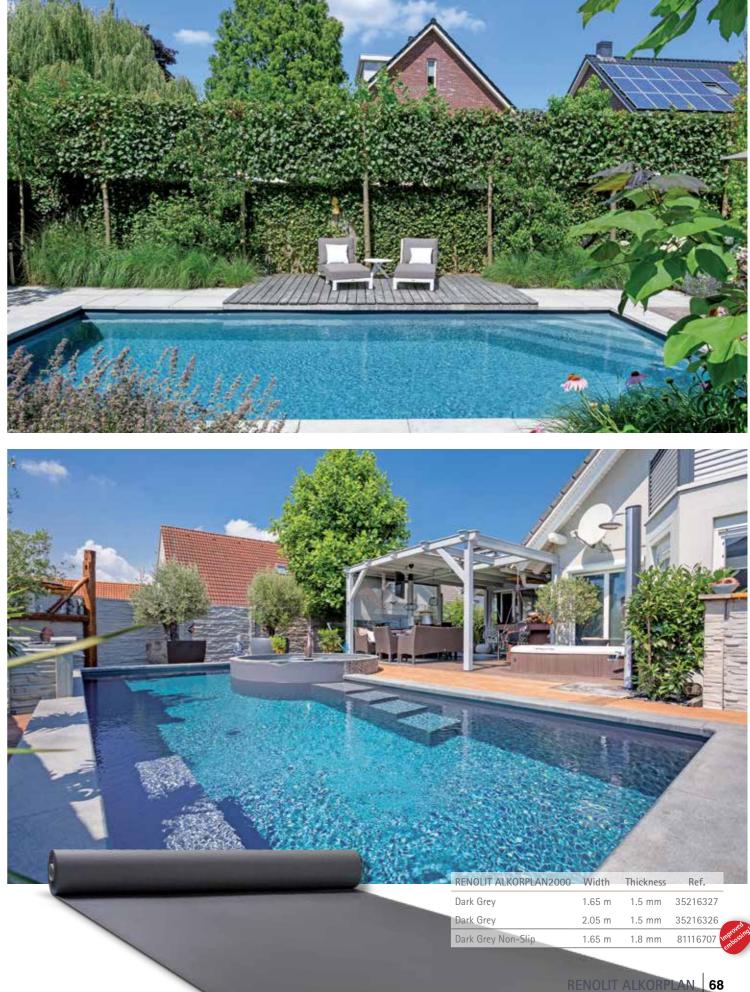

RENOLIT ALKORPLAN2000 Caribbean Green



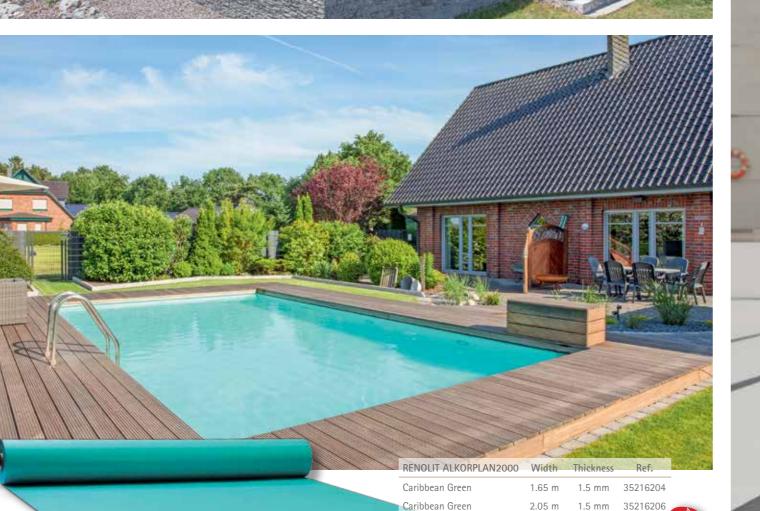

1.65 m

Caribbean Green Non-Slip

1.8 mm

8111670

Although the installation of RENOLIT ALKORPLAN is fast and easy, it should always be installed by qualified professionals to ensure a completely watertight finish.



RENOLIT ALKORPLAN 3000

Contract and a second a second

10

-

-

Persia Sand

Persia Blue 1.65 m 35417217 Persia Sand 1.65 m 35417220 Carrara 1.65 m 35417214 Marble 1.65 m 35417213 Bysance Blue 1.65 m 35417209

enerer ere

3

Platinum 1.65 m

35417402

RENOLIT ALKORPLAN3000 Persia Blue

RENOLIT ALKORPLAN3000 Persia Sand







RENOLIT ALKORPLAN3000 Bysance Blue

RENOLIT ALKORPLAN3000 Carrara



Ref. 1.65 m 1.5 mm 35417209 **Bizancio** Azul

75 RENOLIT ALKORPLAN






RENOLIT ALKORPLAN3000 Marble

RENOLIT ALKORPLAN3000 Platinum



RENOLIT ALKORPLAN3000 Width Thickness Ref. 1.65 m 1.5 mm 35417213 Marble



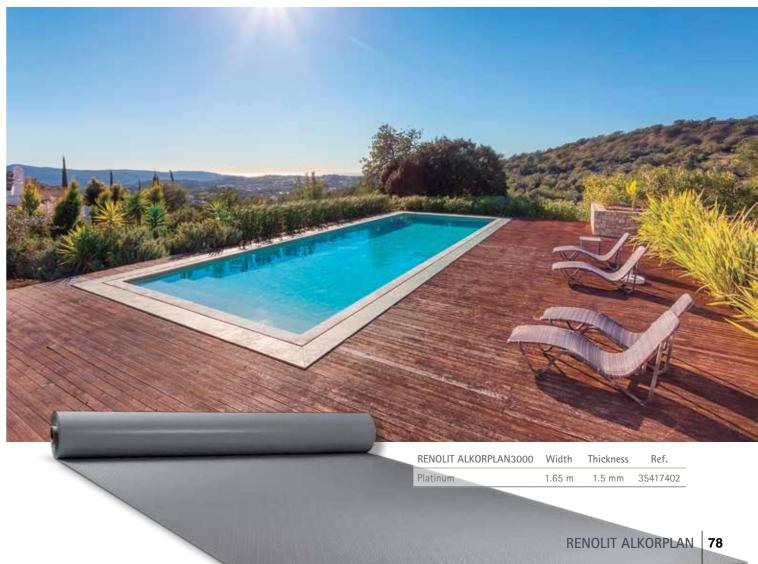

RENOLIT ALKORPLAN3000	Width	Thickness	Ref.
Platinum	1.65 m	1.5 mm	35417402

Butt welding

RENOLIT recommends the butt welding technique on the pool floor on VOGUE, TOUCH and CERAMICS membranes for an impeccable finish of your pool. From an aesthetic point of view, the butt welding technique ensures the joints are practically invisible, especially in swimming pools lined with **RENOLIT** ALKORPLAN VOGUE, **RENOLIT** ALKORPLAN TOUCH or **RENOLIT** ALKORPLAN CERAMICS membranes.

NOT ALL GEOTEXTILES ARE THE SAME!!



By day and with moving water, the welds cannot be seen.



If this swimming pool had been installed with the butt welding system, the joints of the pool floor would have remained invisible. The **RENOLIT ALKORPLAN** geotextile is one of the essential elements for the butt welding.

RENOLIT ALKORPLAN geotextile is an exclusive **RENOLIT** fungicide felt that is installed under the membrane to protect it from any irregularities that the surface of the pool may have and make the bathers steps more comfortable.

NOT ALL GEOTEXTILES ARE THE SAME!!

RENOLIT ALKORPLUS geotextile is made of blue polypropylene, which is rot-proof, and always marked with the **RENOLIT ALKORPLUS** brand.

Advantages:

- 1 The fungicide treatment prevents the proliferation of bacteria under the membrane.
- 2 The geotextile disguises any small imperfection that may exist in the structure of the substrate under the membrane.
- 3 Adds a much more comfortable feel for the bather.
- 4 Helps to maintain the temperature of the pool water.
- 5 Plays a key role in the butt welding system.



Reference	Width (m)
81006005	1.50 *
81006006	1.65
81006007	2.00

*Specific for butt welding.

Advice for preserving your **RENOLIT** ALKORPLAN liner



Carry out a daily test to ensure the the chlorine level is 1ppm and that the pH is between 7.0-7.6

If you disinfect your swimming pool with chlorine or with a salt electrolysis machine it is essential than the level of the chlorine is 1ppm and the pH level is between 7.0 and 7.6.

If you disinfect with bromide the level should be 1ppm and the pH level between 7 and 8. Excessive use of bromide can cause the liner to become brown in colour.



If the pool has a salt chlorinator you must add stabilizer at the beginning of the season

The chlorine generated by the saline electro chlorinator is stronger than normal chlorine.

To dilute add 30ppm of a isocyanuric acid stabilizer at the beginning of the swimming pool season and check daily that level of chlorine at 1ppm and the pH between 7.0 and 7.6.

If your saline electro chlorinator does not have a RedOx cholrine controller you should use a measuring guage. Even if your pool is equipped with an automatic Redox control it is necessary to manually check the chlorine on a very regular basis (daily).

This prevents the chlorinator producing more chlorine than neccesary, which could bleach the liner and irritate eyes.



It is necessary that the TA level is maintained between 100 and 175ppm

TA (total alkalinity) represents the water's capacity for neutralising acids. A balanced TA level keeps pH from fluctuating and getting out of control. A TA level under 100 ppm turns water corrosive. Damage to the liner would be irreversible.

We recommend checking the PA level weekly or after rainfall.





Protect your swimming pool in summer and winter and do not empty it


Swimming pools are built to be full of water. They should not be left empty for long periods of time.

In the summer keep the water level constant.

In winter protect skimmers and filter systems against frost. Ask a pool specialist for the best winter treatment to keep the water in perfect condition the following season. Above all cover the swimming pool in winter.



Water from wells, or of unknown origin should be analysed and, if necessary, treated before it is used to fill or top up the pool



These minerals can react with the chemical products and produce stains on the liner. If this happens ask a specialist to carry out a treatment with **RENOLIT ALKORPLUS Antistain**.

No chemical products should come into direct contact with the liner

The correct and safest way of introducing any chemical product into the swimming pool is by using the skimmer with the circulation pump working.

If it is powder, granules or liquid and it is required to be put directly into the swimming pool, it must be diluted before in a bucket of water, and poured into different areas of the swimming pool. The circulation pump must always be in use to prevent concentration of a product in one area.

Avoid the use of floating dispensers because they can spend too much time in the same position and can bleach the liner.

Do not use chemical products which contain copper

Always read the level of the composition of the chemical products that you use, especially those for algae.

Some anti-algae products contain copper sulphate, these should be avoided.

Use anti- algae with a guaternary ammonia base. These are the best products for your hair and your skin. If by accident you have used a product containing copper, you should apply RENOLIT ALKORPLUS Antistain.

Avoid a build up of dirt and calcareous deposits on the waterline

The lacquer that protects the RENOLIT ALKORPLAN laminate will repel dirt; however, low maintenance and high bathing loads will accelerate the build up of waterline deposits.

Regular cleaning of the waterline with RENOLIT ALKORCLEAN® applied with a sponge or cloth will prevent the build up of grease and scale and avoid permanent staining.



Never use abrasive tools or aggressive cleaning products

Do not use aggressive chemical products or cleaning equipment, such as solvents; brushes with wire or stiff bristles; and abrasive pads or cloths that will damage the membrane. The liner is coated with a protective lacquer which is stain and dirt resistant, however it may be damaged if cleaned with abrasive materials or solvents.

RENOLIT ALKORCLEAN® is an ideal and efficient cleaner for your liner. It may be ordered though your Swimming Pool Specialist.















If you are looking for *comfort and design* in your home, why don't you do it in your pool as well?

www.alkorplan.info/vogue



UK sales RENOLIT Ibérica s.A. c/o G.G. Tomkinson Ltd. The Willows, Pattenden Lane Marden, Kent TN12 9QJ – UK Phone: +44 7387 158288 e-mail: Jb@jbinlimbo.co.uk

This document substitutes and annuls any other that has been previously published on the same subject. The colours shown in this catalogue can vary from the original. **RENOLIT** reserves the right to change colours and designs.



